

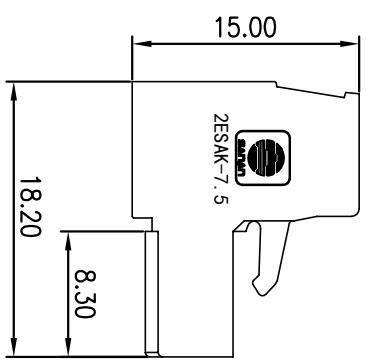


02P:Clasp on the left from this view

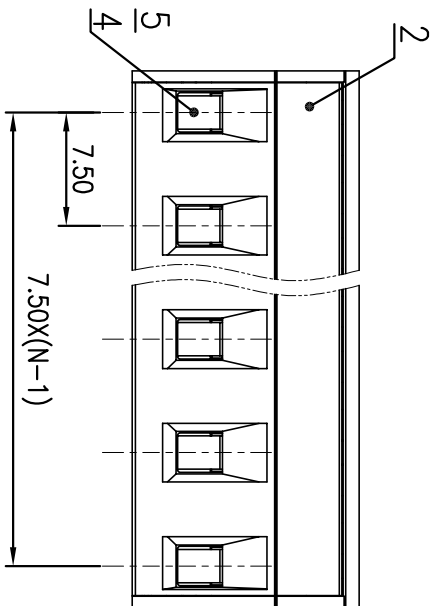

5	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Screw	Steel	M3/Zn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准	UL Standard:	B	C
UL 额定电压/电流	Rated Voltage(V)/Current(A)	300/15	300/10
IEC 标准	IEC Standard:		
过压类别	Overvoltage Category/污染等级		III/2
额定电压/电流	Rated Voltage(V)/Current(A)		400/20
额定脉冲电压	Rated Impulse Voltage(KV)		4
额定扭矩	Torque Tightening(N·m/Lb.in)		M3 0.5/4.43
导线范围	Wire Range(rigid and flexible)(mm ² /AWG)		1.0~2.5/28~12
间距	Pitch(mm)		7.5/N=02~16P
导线长度	Stripping length(mm)		7-8
使用温度范围	Operating temperature(°C)		-40~+105
符合RoHS环保要求	Conform to RoHS		Yes
标准颜色编号	Standard color number:		/
PANTONE	/ RAL		/

MATERIAL: SURFACE:

MAT NO.:
STATUS:
APPD:
CHKD:
DRT:

宁波三安电子科技有限公司
 Sanan Electrical Technology Co. Ltd

ZESAK-7.5-XXP-1Y-1000A(H)

DRAWING NO.:
 TYPE:
 SCALE:
 SHEET: 1/1

公差 (General tolerances)(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	

0.1/10
 ±Z